
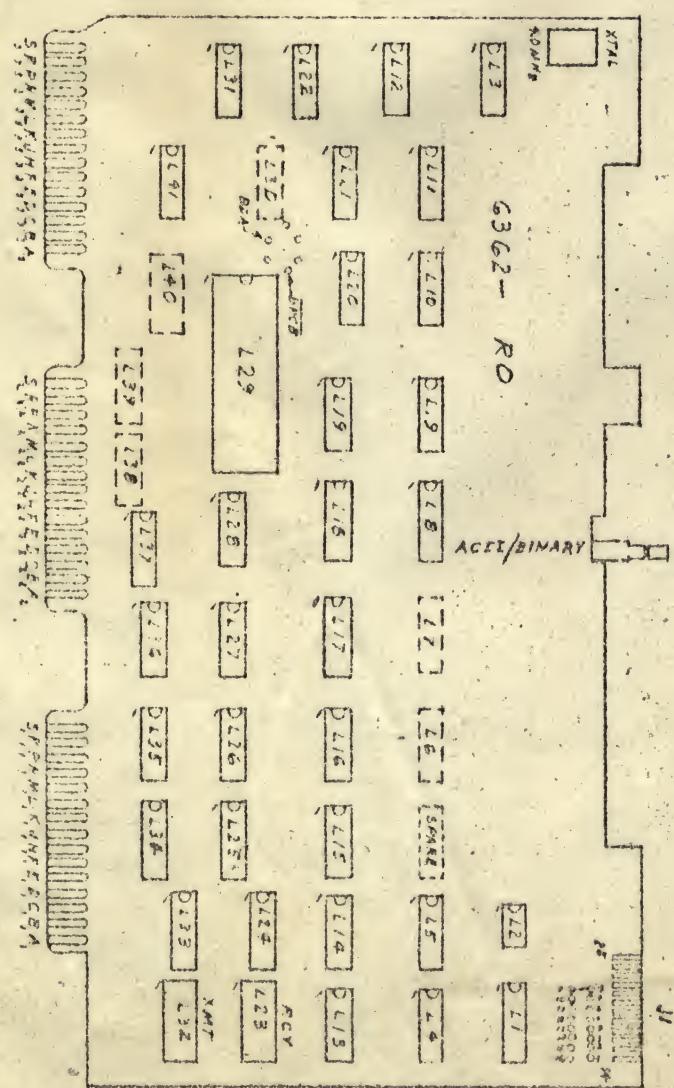
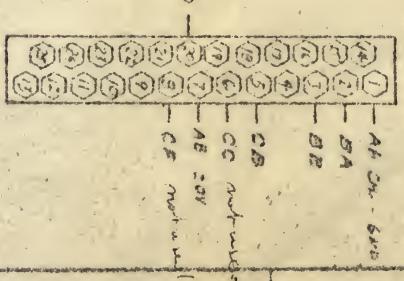


JUMPS FOR I/O READ

BAUD RATE

RES + 5VR

TOLERANCE	
±0.05%	±0.05%

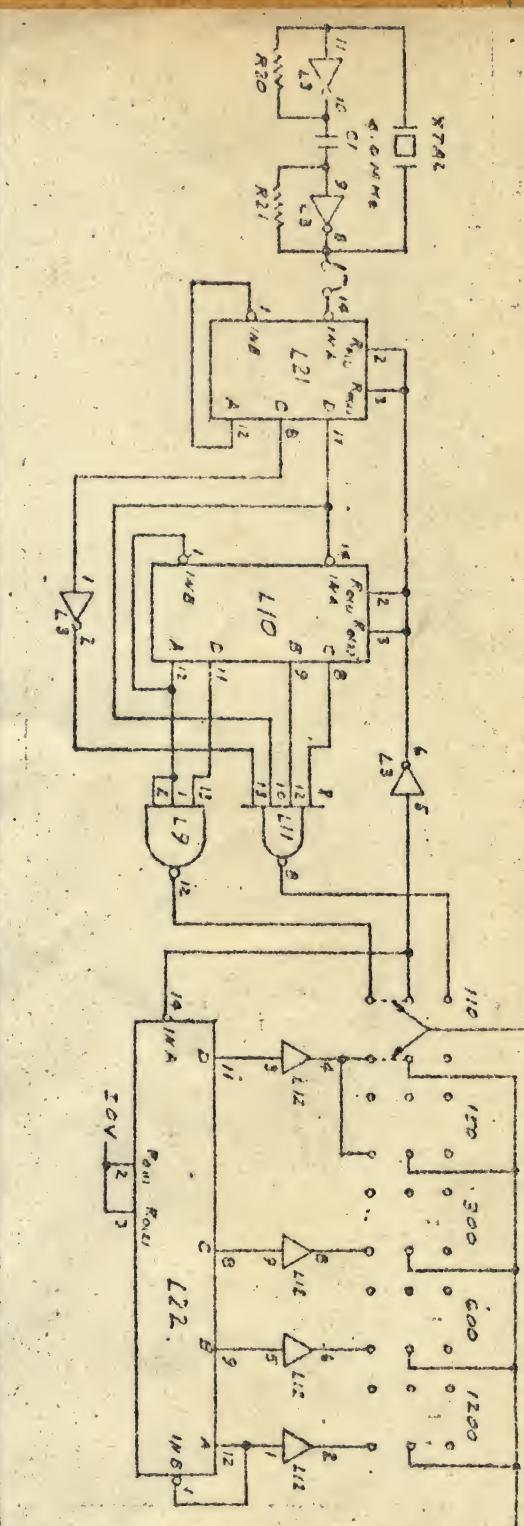

BINARY

SPPR 55555555555555555555

SPPR 55555555555555555555

G

H

I

J

K